

# U37-J1900 Series “AIO” Terminal

Experience quality, design, and style in our most popular all-in-one “AIO” terminal solution . This reliable and state of the art AIO Terminal features a Bay Trail Celeron J1900 (2.0 GHz) processor, true fanless cooling system, optional rear mounted 2nd display (power built in), and a compact base design which is ideal for small workplace operations. Available in 5 wire resistive touch technology or Projective capacitive multi -touch technology



Integrated MSR



Ports and Cable Management




Cable Management

## U37-J1900R & U37-J1900 AIO” Terminals

### Specifications

#### U37-J1900R Series (15” AIO)

- **TOUCH:** 5-Wire Resistive Type or Projective Capacitive
- **CPU:** Intel® Bay Trail-D Platform, Celeron® Processor J1900 (2.0 GHz, 2M Cache)
- **MEMORY:** 4 GB DDR3-1333
- **HARD DRIVE:** 120GB SSD (Upgradable)
- **VIDEO GRAPHICS:** Intel HD Graphics Support
- **BRIGHTNESS:** 300 Nits
- **RESOLUTION:** 1024 X 768 Pixel
- **CONTRAST:** 1000:1
- **USB PORTS:** 5 x USB 2.0 (External, 4 x bottom/ 1 x side)
- **VIDEO PORTS:** 1 x DB-15, Female
- **LAN:** 1x RJ45 Gigabyte
- **COM PORTS:** 3 x COM DB9, with power output, +5VDC/ +12VDC, selectable by Jumper
- **PARALLEL:** 1 x DB25 Parallel Port
- **SOUND:** 1 x Internal Speaker
- **CASH DRAWER:** 1 x RJ-11, +12/+24 VDC
- **DC OUT:** 1 x 12VDC Jack for Customer Display or 2nd Display
- **WEIGHT:** 30 lbs Gw Includes Packaging
- **POWER:** External Ac 12V 10amp, universal auto sensing, 36W
- **DIMENSIONS** 14” x 12.00” x 8” (LxWxH)
- **WEIGHT:** 12lbs
- **MOUNTS:** MSR, Rear Display
- **CERTIFICATIONS:** FCC Class A, CE, RoHs
- **OPERATING SYSTEMS:** Optional
- **POWER:** +12VDC 60W, 4-pin Connector with Lock (External Adaptor: 100~240 VAC, 50/60HZ)
- **LCD DISPLAY:** High Bright 15 1024 x 768 16.7M Colors
- **OPERATING TEMP:** 0°C~40°C
- **OPERATING HUMIDITY:** 20% ~ 80% RH non-condensing
- **OPERATING SYSTEMS:** Optional

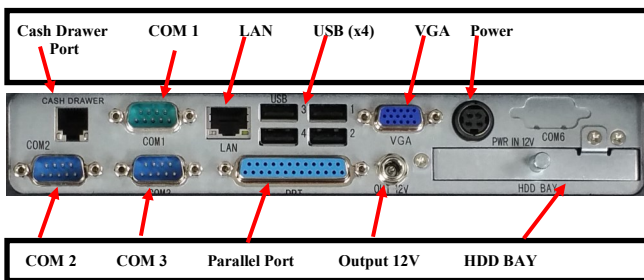

Cash Drawers      Printers      Rear LCD